

PULSARLUBE E

Automatic Single-Point Lubricator
www.pulsarlube.com / info@pulsarlube.com

WARNING: See User Manual


- Potential electrostatic charging hazard.
- The cleaning from the PULSARLUBE shall be done with a damp cloth.
- Do not change, replace, or charge battery cells.
- The batteries are not user-replaceable.

Lot No.
A1720G

Product No. / Grease Type
EO240/ OLIO TURBO 68

Pulsarlube USA, Inc.
1480 Howard Street, Elk Grove Village, IL 60007, USA
TEL : 1-847-593-5300 FAX : 1-847-593-5303

55°C
(131°F)
-20°C
(-4°F)

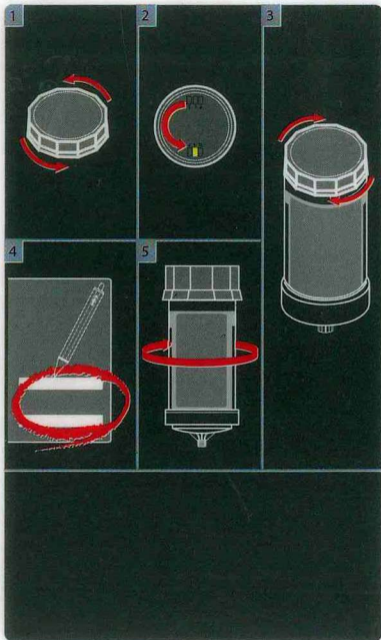

UL US LISTED
E352761

Cl. I, Div. 1, Gps. A, B, C, D
Cl. II, Div. 1, Gps. E, F, G
Hazardous locations, intrinsically safe, Exia,
Temp. Code T4, -25°C ≤ Ta ≤ +55°C

CE 0344 **IP68**

Ex II G Ex ia IIC T4 Ga
INERIS 12ATEX0062X
-20°C ≤ Ta ≤ +55°C



Ex ia IIC T4
12-KB2BO-0283X
-20°C ≤ Ta ≤ +55°C

Ex ia IIC T4 Ga
IECEX KTL 12.0008X
-20°C ≤ Ta ≤ +55°C

MSHA

Approval No. 18-A180003-0
TESTED FOR INTRINSIC SAFETY IN METHANE
-AIR MIXTURES ONLY



Danger

Hazard Statement

May be harmful if swallowed. Causes skin irritation
Causes damage to organs through prolonged or repeated exposure
Harmful to aquatic life with long lasting effects

Precautionary/First aid Statement

Wash thoroughly after handling. Wear protective gloves/protective clothing/
eye protection/face protection. Avoid release to the environment. Get medical
advice/attention if you feel unwell. Store in a well-ventilated place
Dispose of contents, as specified in regulations.

※ For other details, refer to the SDS.

Installed

Expires

240ml

Made in Korea